



Product Technical Data Sheet

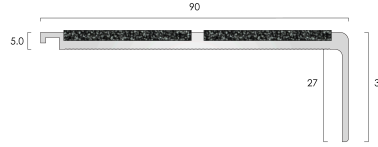

Catalogue Reference	AN52 GRP
Uniclass2015	Pr_35_90_31_74 RIGID STAIR NOSINGS
General Description	Double Channel/Square Front Stair Nosing. Supplied with GRP infills.
Nosing Construction	Stair Nosing With Infill
Material	Aluminium Alloy 6063 T6
Tread Dimension	90 mm
Nose Dimension	32 mm
Gauge	5.0 mm
Supplied Cut To Size, up to a maximum length of	2400 mm
Finishes Available & Light Reflective Values	<p>Mill Aluminium - LRV: 71.65</p> <p>Infills</p> <p>GRPTI37.25 Infill</p> <p>Black - LRV: 4.76</p> <p>Yellow - LRV: 32.13</p> <p>Grey - LRV: 47.07</p>
Screw Size	8
Compatible Products	ANEXT GRP, ANRE25
Application	For abutting to flooring to finish the nose edge of stairs. Can be rebated to sit flush in wooden steps. Installation guide available. Compatible with profiles ANRE25 Ramp Detail and ANEXT GRP tread extender. Installation guide available.
Suitability	Exterior and wet environments and very heavy foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.

Infill Options



Infill	GRPTI37.25 Infill
Material	Glass-reinforced plastic with quartz grit bonded on top (with resin)
Slip Resistance Values	SRV Wet: 73 SRV Dry: 81
Drilling	Drilled with retro fit infill Undrilled with infill stuck in channel Undrilled with infill supplied loose

Made with Precision, Finished with Care

CAT Flooring Accessories, Units 24 A,B,C Park Avenue Estate, Luton, Bedfordshire LU3 3BP, UK

+44 (0) 1582 561 500

sales@catflooringaccessories.com

www.catflooringaccessories.com