


Product Technical Data Sheet

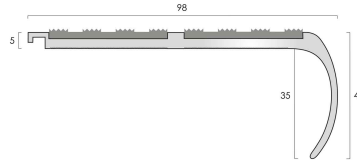

Catalogue Reference	AN82
Uniclass2015	Pr_35_90_31_74 RIGID STAIR NOSINGS
General Description	Double Channel/Bull Nose Stair Nosing. Supplied with choice of infill.
Nosing Construction	Stair Nosing With Infill
Material	Aluminium Alloy 6063 T6
Tread Dimension	98 mm
Nose Dimension	40 mm
Gauge	5 mm
Supplied cut to customer sizes up to:	3200 mm
Finishes Available & Light Reflective Values	<p>Polished Aluminium - LRV: 75.55</p> <p><b>Infills</b></p> <p><b>ATI37.25 Aluminium</b></p> <p>Mill Aluminium - LRV: 71.65 Satin Aluminium - LRV: 65.40 Polished Aluminium - LRV: 75.55</p> <p><b>Infills</b></p> <p><b>Olympic Grip</b></p> <p>Black - LRV: 4.85</p> <p><b>Infills</b></p> <p><b>37.25mm Castellated PVC</b></p> <p>Black - LRV: 4.25 White - LRV: 84.22 Light Grey - LRV: 12.33 Flint - LRV: 11.27 Granite - LRV: 7.02 Peat - LRV: 5.88 Porth Stone - LRV: 52.91</p> <p><b>Infills</b></p> <p><b>37.25mm Smooth Textured PVC</b></p> <p>Black - LRV: 4.47</p>
Drilling	Drilled for concealing plugs

	Undrilled Drilled with retro fit infill
<b>Screw Size</b>	8
<b>Compatible Products</b>	ANEXT, ANRE25, ANE
<b>Application</b>	For abutting to carpet and carpet tiles to finish the nose edge of stairs. Can be rebated to sit flush in wooden steps. Compatible with profiles ANE Nap Detail, ANRE25 Ramp Detail and ANEXT extension tread. Installation guide available.
<b>Suitability</b>	Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.
<b>Post Consumer Recyclability</b>	This product is 100% recyclable at suitable disposal centres.

# Infill Options



<b>Infill</b>	AT137.25 Aluminium Insert
<b>Material</b>	Aluminium Alloy 6063 T6
<b>Slip Resistance Values</b>	SRV Wet: 54 SRV Dry: 82
<b>Drilling</b>	Undrilled Drilled with retro fit infill

<b>Infill</b>	Olympic Grip Insert
<b>Material</b>	Aluminium Oxide
<b>Slip Resistance Values</b>	SRV Wet: 71 SRV Dry: 102
<b>Drilling</b>	Undrilled Drilled with retro fit infill



<b>Infill</b>	37.25mm Castellated PVC Insert
<b>Material</b>	PVC Compound
<b>Slip Resistance Values</b>	SRV Wet: 76 SRV Dry: 85
<b>Drilling</b>	Drilled for concealing plugs Drilled with retro fit infill Undrilled



<b>Infill</b>	37.25mm Smooth Textured PVC Insert
<b>Material</b>	PVC Compound
<b>Slip Resistance Values</b>	SRV Wet: 56 SRV Dry: 65
<b>Drilling</b>	Drilled for concealing plugs Drilled with retro fit infill Undrilled

**Made with Precision, Finished with Care**

Carpet Accessory Trims Limited. Units 24 A,B,C Park Avenue Estate, Luton, Bedfordshire LU3 3BP, UK

+44 (0) 1582 561 500

[sales@catflooringaccessories.com](mailto:sales@catflooringaccessories.com)

[www.catflooringaccessories.com](http://www.catflooringaccessories.com)