CAT | FLOORING ACCESSORIES

Updated: May 2026

# Product Technical Data Sheet

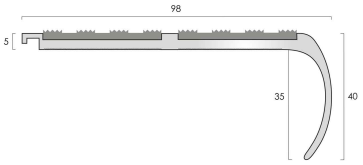


| | |
|---|---|
| Catalogue Reference | AN82 |
| Uniclass2015 | Pr_35_90_31_74 RIGID STAIR NOSINGS |
| General Description | Double Channel/Bull Nose Stair Nosing. Supplied with choice of infill. |
| Nosing Construction | Stair Nosing With Infill |
| Material | Aluminium Alloy 6063 T6 |
| Tread Dimension | 98 mm |
| Nose Dimension | 40 mm |
| Gauge | 5.0 mm |
| Supplied Cut To Size, up to a maximum length of | 3200 mm |
| Finishes Available & Light Reflective Values | Polished Aluminium - LRV: 75.55<br>**Infills**<br>**ATI37.25 Aluminium**<br>Satin Aluminium - LRV: 65.40<br>Mill Aluminium - LRV: 71.65<br>Polished Aluminium - LRV: 75.55<br>**Infills**<br>**Olympic Grip**<br>Black - LRV: 4.85<br>**Infills**<br>**37.25mm Castellated PVC**<br>Black - LRV: 4.25<br>Peat - LRV: 5.88<br>Granite - LRV: 7.02<br>Flint - LRV: 11.27<br>Light Grey - LRV: 12.33<br>Polar Grey - LRV: 42.53<br>Porth Stone - LRV: 52.91<br>Yellow - LRV: 54.91<br>White - LRV: 84.22<br>**Infills**<br>**37.25mm Smooth Textured PVC** |

| | |
|---|---|
| | Black - LRV: 4.47<br>Light Grey - LRV: 12.74<br>Polar Grey - LRV: 42.73<br>Porth Stone - LRV: 53.11 |
| Screw Size | 8 |
| Compatible Products | ANEXT, ANRE25, ANE NAP |
| Additional Information | This product is also available in Mill Aluminium with a heavy-duty anti-slip glass-fibre reinforced plastic infill for external/wet installations. Product Reference: AN82 GRP |
| Application | For abutting to carpet and carpet tiles to finish the nose edge of stairs. Can be rebated to sit flush in wooden steps. Compatible with profiles ANE Nap Detail, ANRE25 Ramp Detail and ANEXT extension tread. Installation guide available. |
| Suitability | Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings. |
| Post Consumer Recyclability | This product is 100% recyclable at suitable disposal centres. |

# Infill Options




| | |
|---|---|
| Infill | ATI37.25 Aluminium Insert |
| Material | Aluminium Alloy 6063 T6 |
| Slip Resistance Values | SRV Wet: 54<br>SRV Dry: 82 |
| Drilling | Undrilled<br>Drilled with retro fit infill |



| | |
|---|---|
| Infill | Olympic Grip Insert |
| Material | Aluminium Oxide |
| Slip Resistance Values | SRV Wet: 71<br>SRV Dry: 102 |
| Drilling | Undrilled<br>Drilled with retro fit infill |




| | |
|---|---|
| Infill | 37.25mm Castellated PVC Insert |
| Material | PVC Compound |
| Slip Resistance Values | SRV Wet: 76<br>SRV Dry: 85 |
| Drilling | Drilled for concealing plugs<br>Drilled with retro fit infill<br>Undrilled |




| | |
|---|---|
| Infill | 37.25mm Smooth Textured PVC Insert |
| Material | PVC Compound |
| Slip Resistance Values | SRV Wet: 56<br>SRV Dry: 65 |
| Drilling | Drilled for concealing plugs<br>Drilled with retro fit infill<br>Undrilled |

## Made with Precision, Finished with Care

CAT Flooring Accessories, Units 24 A,B,C Park Avenue Estate, Luton, Bedfordshire LU3 3BP, UK

+44 (0) 1582 561 500 sales@catflooringaccessories.com www.catflooringaccessories.com