


Product Technical Data Sheet

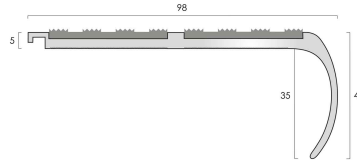

Catalogue Reference	AN82
Uniclass2015	Pr_35_90_31_74 RIGID STAIR NOSINGS
General Description	Double Channel/Bull Nose Stair Nosing. Supplied with choice of infill.
Nosing Construction	Stair Nosing With Infill
Material	Aluminium Alloy 6063 T6
Tread Dimension	98 mm
Nose Dimension	40 mm
Gauge	5 mm
Supplied cut to customer sizes up to:	3200 mm
Finishes Available & Light Reflective Values	<p>Satin Aluminium - LRV: 65.4</p> <p>Infills</p> <p>ATI37.25 Aluminium</p> <p>Mill Aluminium - LRV: 71.65 Satin Aluminium - LRV: 65.40 Polished Aluminium - LRV: 75.55</p> <p>Infills</p> <p>Olympic Grip</p> <p>Black - LRV: 4.85</p> <p>Infills</p> <p>37.25mm Castellated PVC</p> <p>Black - LRV: 4.25 White - LRV: 84.22 Light Grey - LRV: 12.33 Flint - LRV: 11.27 Granite - LRV: 7.02 Peat - LRV: 5.88 Porth Stone - LRV: 52.91</p> <p>Infills</p> <p>37.25mm Smooth Textured PVC</p> <p>Black - LRV: 4.47</p>
Drilling	Drilled for concealing plugs

	Undrilled Drilled with retro fit infill
Screw Size	8
Compatible Products	ANEXT, ANRE25, ANE
Application	For abutting to carpet and carpet tiles to finish the nose edge of stairs. Can be rebated to sit flush in wooden steps. Compatible with profiles ANE Nap Detail, ANRE25 Ramp Detail and ANEXT extension tread. Installation guide available.
Suitability	Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.
Post Consumer Recyclability	This product is 100% recyclable at suitable disposal centres.

Infill Options



Infill	AT137.25 Aluminium Insert
Material	Aluminium Alloy 6063 T6
Slip Resistance Values	SRV Wet: 54 SRV Dry: 82
Drilling	Undrilled Drilled with retro fit infill

Infill	Olympic Grip Insert
Material	Aluminium Oxide
Slip Resistance Values	SRV Wet: 71 SRV Dry: 102
Drilling	Undrilled Drilled with retro fit infill



Infill	37.25mm Castellated PVC Insert
Material	PVC Compound
Slip Resistance Values	SRV Wet: 76 SRV Dry: 85
Drilling	Drilled for concealing plugs Drilled with retro fit infill Undrilled



Infill	37.25mm Smooth Textured PVC Insert
Material	PVC Compound
Slip Resistance Values	SRV Wet: 56 SRV Dry: 65
Drilling	Drilled for concealing plugs Drilled with retro fit infill Undrilled

Made with Precision, Finished with Care

Carpet Accessory Trims Limited. Units 24 A,B,C Park Avenue Estate, Luton, Bedfordshire LU3 3BP, UK

+44 (0) 1582 561 500

sales@catflooringaccessories.com

www.catflooringaccessories.com