


Product Technical Data Sheet

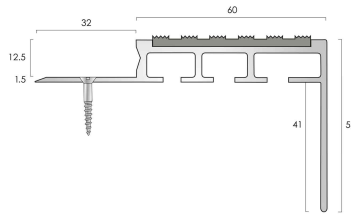

Catalogue Reference	ANT60/55/12.5
Uniclass2015	Pr_35_90_31_74 RIGID STAIR NOSINGS
General Description	Single Channel/Square Front Stair Nosing. Supplied with choice of infill.
Nosing Construction	Stair Nosing With Infill
Material	Aluminium Alloy 6063 T6
Tread Dimension	92 mm
Nose Dimension	55 mm
Gauge	14 mm
Supplied Cut To Size, up to a maximum length of	3200 mm
Finishes Available & Light Reflective Values	<p>Satin Aluminium - LRV: 65.40</p> <p><b>Infills</b></p> <p><b>ATI49.5 Aluminium</b></p> <p>Black Anodised - LRV: 4.80</p> <p>Bronze - LRV: 10.10</p> <p>Light Bronze - LRV: 27.25</p> <p>Satin Aluminium - LRV: 65.40</p> <p>Mill Aluminium - LRV: 71.65</p> <p>Polished Aluminium - LRV: 75.55</p> <p><b>Infills</b></p> <p><b>Olympic Grip</b></p> <p>Black - LRV: 4.85</p> <p><b>Infills</b></p> <p><b>Castellated PVC</b></p> <p>Black - LRV: 4.25</p> <p>Nimbus - LRV: 4.77</p> <p>Regency - LRV: 5.16</p> <p>Rustic - LRV: 5.52</p> <p>Claret - LRV: 5.83</p> <p>Peat - LRV: 5.88</p> <p>Spruce - LRV: 6.38</p> <p>Mid Blue - LRV: 6.53</p> <p>Granite - LRV: 7.02</p>

Jade - LRV: 7.33  
 Poppy - LRV: 10.01  
 Olive - LRV: 10.27  
 Fawn - LRV: 11.27  
 Flint - LRV: 11.27  
 Light Grey - LRV: 12.33  
 Gold - LRV: 16.84  
 Ivory - LRV: 37.42  
 Polar Grey - LRV: 42.53  
 Porth Stone - LRV: 52.91  
 Yellow - LRV: 54.91  
 White - LRV: 84.22

**Infills**

**Smooth Textured PVC**

Black - LRV: 4.47  
 Light Grey - LRV: 12.74  
 Polar Grey - LRV: 42.73  
 Porth Stone - LRV: 53.11

<b>Drilling</b>	Drilled through the tail plate for concealed fixing
<b>Screw Size</b>	8
<b>Application</b>	For use with thicker floor coverings such as ceramics, stone and timber to finish the nose edge of stairs. Installation guide available.
<b>Suitability</b>	Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.
<b>Post Consumer Recyclability</b>	This product is 100% recyclable at suitable disposal centres.


# Infill Options



<b>Infill</b>	ATI49.5 Aluminium Insert
<b>Material</b>	Aluminium Alloy 6063 T6
<b>Slip Resistance Values</b>	SRV Wet: 54 SRV Dry: 82



<b>Infill</b>	Olympic Grip Insert
<b>Material</b>	Aluminium Oxide
<b>Slip Resistance Values</b>	SRV Wet: 71 SRV Dry: 102



<b>Infill</b>	Castellated PVC Insert
<b>Material</b>	PVC Compound
<b>Slip Resistance Values</b>	SRV Wet: 76 SRV Dry: 85



Infill	Smooth Textured PVC Insert
Material	PVC Compound
Slip Resistance Values	SRV Wet: 56 SRV Dry: 65

**Made with Precision, Finished with Care**

CAT Flooring Accessories, Units 24 A,B,C Park Avenue Estate, Luton, Bedfordshire LU3 3BP, UK

+44 (0) 1582 561 500

[sales@catflooringaccessories.com](mailto:sales@catflooringaccessories.com)

[www.catflooringaccessories.com](http://www.catflooringaccessories.com)