


Product Technical Data Sheet

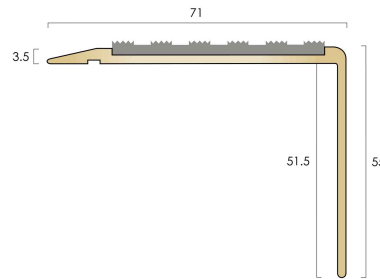

Catalogue Reference	BN71/55SLR
Uniclass2015	Pr_35_90_31_74 RIGID STAIR NOSINGS
General Description	Single Channel/Square Front Stair Nosing. Supplied with choice of infill.
Nosing Construction	Stair Nosing With Infill
Material	Solid Brass Grade H/H CZ108 BS EN12164:2016
Tread Dimension	71 mm
Nose Dimension	55 mm
Gauge	3.5 mm ramping down to 1mm
Supplied Cut To Size, up to a maximum length of	3200 mm
Finishes Available & Light Reflective Values	<p>Polished Brass - LRV: 71.45</p> <p><b>Infills</b></p> <p><b>BTI49.5 Brass</b></p> <p>Antique Bronze - LRV: 9.15          Antique Brass - LRV: 29.55          Satin Brass - LRV: 59.55          Polished Brass - LRV: 71.45</p> <p><b>Infills</b></p> <p><b>Smooth Textured PVC</b></p> <p>Black - LRV: 4.47          Light Grey - LRV: 12.74          Polar Grey - LRV: 42.73          Porth Stone - LRV: 53.11</p> <p><b>Infills</b></p> <p><b>Castellated PVC</b></p> <p>Black - LRV: 4.25          Nimbus - LRV: 4.77          Regency - LRV: 5.16          Rustic - LRV: 5.52          Claret - LRV: 5.83          Peat - LRV: 5.88          Spruce - LRV: 6.38          Mid Blue - LRV: 6.53</p>

Granite - LRV: 7.02  
 Jade - LRV: 7.33  
 Poppy - LRV: 10.01  
 Olive - LRV: 10.27  
 Fawn - LRV: 11.27  
 Flint - LRV: 11.27  
 Light Grey - LRV: 12.33  
 Gold - LRV: 16.84  
 Ivory - LRV: 37.42  
 Polar Grey - LRV: 42.53  
 Porth Stone - LRV: 52.91  
 Yellow - LRV: 54.91  
 White - LRV: 84.22


**Infills**

**Olympic Grip**

Black - LRV: 4.85

<b>Screw Size</b>	6
<b>Application</b>	To finish the nose edge of stone and timber stairs and stairs fitted with ceramics or hard flooring, e.g. laminates, LVT, vinyl, lino.
<b>Suitability</b>	Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.
<b>Post Consumer Recyclability</b>	This product is 100% recyclable at suitable disposal centres.


# Infill Options



<b>Infill</b>	BTI49.5 Brass Insert
<b>Material</b>	Solid Brass Grade H/H CZ108 BS EN12164:2016
<b>Slip Resistance Values</b>	SRV Wet: 54 SRV Dry: 82
<b>Drilling</b>	Undrilled Drilled with retro fit infill



<b>Infill</b>	Smooth Textured PVC Insert
<b>Material</b>	PVC Compound
<b>Slip Resistance Values</b>	SRV Wet: 56 SRV Dry: 65
<b>Drilling</b>	Drilled for concealing plugs Undrilled Drilled with retro fit infill



<b>Infill</b>	Castellated PVC Insert
<b>Material</b>	PVC Compound
<b>Slip Resistance Values</b>	SRV Wet: 76 SRV Dry: 85

Drilling	Drilled for concealing plugs Undrilled Drilled with retro fit infill
----------	--



Infill	Olympic Grip Insert
Material	Aluminium Oxide
Slip Resistance Values	SRV Wet: 71 SRV Dry: 102
Drilling	Undrilled Drilled with retro fit infill

**Made with Precision, Finished with Care**

CAT Flooring Accessories, Units 24 A,B,C Park Avenue Estate, Luton, Bedfordshire LU3 3BP, UK

+44 (0) 1582 561 500

[sales@catflooringaccessories.com](mailto:sales@catflooringaccessories.com)

[www.catflooringaccessories.com](http://www.catflooringaccessories.com)