


Product Technical Data Sheet

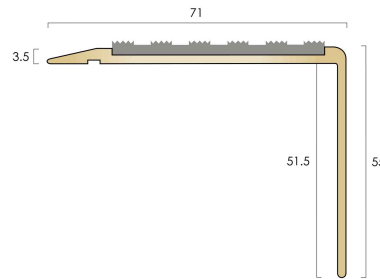

Catalogue Reference	BN71/55SLR
Uniclass2015	Pr_35_90_31_74 RIGID STAIR NOSINGS
General Description	Single Channel/Square Front Stair Nosing. Supplied with choice of infill.
Nosing Construction	Stair Nosing With Infill
Material	Solid Brass Grade H/H CZ108 BS EN12164:2016
Tread Dimension	71 mm
Nose Dimension	55 mm
Gauge	3.5 mm ramping down to 1mm
Supplied Cut To Size, up to a maximum length of	2700 mm
Finishes Available & Light Reflective Values	<p>Satin Brass - LRV: 59.55</p> <p>Infills</p> <p>BTI49.5 Brass</p> <p>Antique Bronze - LRV: 9.15 Antique Brass - LRV: 29.55 Satin Brass - LRV: 59.55 Polished Brass - LRV: 71.45</p> <p>Infills</p> <p>Smooth Textured PVC</p> <p>Black - LRV: 4.47 Light Grey - LRV: 12.74 Polar Grey - LRV: 42.73 Porth Stone - LRV: 53.11</p> <p>Infills</p> <p>Castellated PVC</p> <p>Black - LRV: 4.25 Nimbus - LRV: 4.77 Regency - LRV: 5.16 Rustic - LRV: 5.52 Claret - LRV: 5.83 Peat - LRV: 5.88 Spruce - LRV: 6.38 Mid Blue - LRV: 6.53</p>

Granite - LRV: 7.02
 Jade - LRV: 7.33
 Poppy - LRV: 10.01
 Olive - LRV: 10.27
 Fawn - LRV: 11.27
 Flint - LRV: 11.27
 Light Grey - LRV: 12.33
 Gold - LRV: 16.84
 Ivory - LRV: 37.42
 Polar Grey - LRV: 42.53
 Porth Stone - LRV: 52.91
 Yellow - LRV: 54.91
 White - LRV: 84.22


Infills

Olympic Grip

Black - LRV: 4.85

Screw Size	6
Application	To finish the nose edge of stone and timber stairs and stairs fitted with ceramics or hard flooring, e.g. laminates, LVT, vinyl, lino.
Suitability	Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.
Post Consumer Recyclability	This product is 100% recyclable at suitable disposal centres.


Infill Options



Infill	BTI49.5 Brass Insert
Material	Solid Brass Grade H/H CZ108 BS EN12164:2016
Slip Resistance Values	SRV Wet: 54 SRV Dry: 82
Drilling	Undrilled Drilled with retro fit infill



Infill	Smooth Textured PVC Insert
Material	PVC Compound
Slip Resistance Values	SRV Wet: 56 SRV Dry: 65
Drilling	Drilled for concealing plugs Undrilled Drilled with retro fit infill



Infill	Castellated PVC Insert
Material	PVC Compound
Slip Resistance Values	SRV Wet: 76 SRV Dry: 85

Drilling	Drilled for concealing plugs Undrilled Drilled with retro fit infill
----------	--



Infill	Olympic Grip Insert
Material	Aluminium Oxide
Slip Resistance Values	SRV Wet: 71 SRV Dry: 102
Drilling	Undrilled Drilled with retro fit infill

Made with Precision, Finished with Care

CAT Flooring Accessories, Units 24 A,B,C Park Avenue Estate, Luton, Bedfordshire LU3 3BP, UK

+44 (0) 1582 561 500

sales@catflooringaccessories.com

www.catflooringaccessories.com