


Product Technical Data Sheet

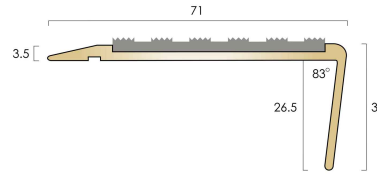

Catalogue Reference	BN71SLR-R
Uniclass2015	Pr_35_90_31_74 RIGID STAIR NOSINGS
General Description	Single Channel/Raked Front Stair Nosing. Supplied with choice of infill.
Nosing Construction	Stair Nosing With Infill
Material	Solid Brass Grade H/H CZ108 BS EN12164:2016
Tread Dimension	71 mm
Nose Dimension	30 mm
Gauge	3.5 mm ramping down to 1mm
Supplied cut to customer sizes up to:	2500 mm
Finishes Available & Light Reflective Values	<p>Antique Bronze - LRV: 9.15</p> <p>Infills</p> <p>BTI49.5 Brass</p> <p>Polished Brass - LRV: 71.45 Satin Brass - LRV: 59.55 Antique Brass - LRV: 29.55 Antique Bronze - LRV: 9.15</p> <p>Infills</p> <p>Smooth Textured PVC</p> <p>Black - LRV: 4.47 Light Grey - LRV: 12.74 Polar Grey - LRV: 42.73 Porth Stone - LRV: 53.11</p> <p>Infills</p> <p>Castellated PVC</p> <p>Black - LRV: 4.25 White - LRV: 84.22 Light Grey - LRV: 12.33 Flint - LRV: 11.27 Granite - LRV: 7.02 Rustic - LRV: 5.52 Fawn - LRV: 11.27 Ivory - LRV: 37.42 Spruce - LRV: 6.38</p>

	<p>Jade - LRV: 7.33 Regency - LRV: 5.16 Mid Blue - LRV: 6.53 Nimbus - LRV: 4.77 Peat - LRV: 5.88 Yellow - LRV: 54.91 Poppy - LRV: 10.01 Claret - LRV: 5.83 Porth Stone - LRV: 52.91 Polar Grey - LRV: 42.53</p> <p>Infills</p> <p>Olympic Grip</p> <p>Black - LRV: 4.85</p>
Drilling	<p>Drilled for concealing plugs Undrilled Drilled with retro fit infill</p>
Screw Size	6
Application	To finish the nose edge of stone and timber stairs and stairs fitted with ceramics or hard flooring, e.g. laminates, LVT, vinyl, lino.
Suitability	<p>Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.</p> <p>Please Note: Antique Brass and Antique Bronze finishes are a chemically applied process and are hand finished with a variance from batch to batch. They are designed to create an aged, unpolished effect.</p>
Post Consumer Recyclability	This product is 100% recyclable at suitable disposal centres.

Infill Options



Infill	BTI49.5 Brass Insert
Material	Solid Brass Grade H/H CZ108 BS EN12164:2016
Slip Resistance Values	SRV Wet: 54 SRV Dry: 82
Drilling	Undrilled Drilled with retro fit infill



Infill	Smooth Textured PVC Insert
Material	PVC Compound
Slip Resistance Values	SRV Wet: 56 SRV Dry: 65
Drilling	Drilled for concealing plugs Undrilled Drilled with retro fit infill



Infill	Castellated PVC Insert
Material	PVC Compound
Slip Resistance Values	SRV Wet: 76 SRV Dry: 85
Drilling	Drilled for concealing plugs Undrilled Drilled with retro fit infill

Infill	Olympic Grip Insert
Material	Aluminium Oxide
Slip Resistance Values	SRV Wet: 71 SRV Dry: 102
Drilling	Undrilled Drilled with retro fit infill

Made with Precision, Finished with Care

Carpet Accessory Trims Limited. Units 24 A,B,C Park Avenue Estate, Luton, Bedfordshire LU3 3BP, UK

+44 (0) 1582 561 500

sales@catflooringaccessories.com

www.catflooringaccessories.com