


Product Technical Data Sheet

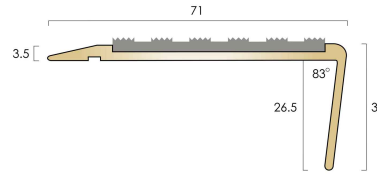

Catalogue Reference	BN71SLR-R
Uniclass2015	Pr_35_90_31_74 RIGID STAIR NOSINGS
General Description	Single Channel/Raked Front Stair Nosing. Supplied with choice of infill.
Nosing Construction	Stair Nosing With Infill
Material	Solid Brass Grade H/H CZ108 BS EN12164:2016
Tread Dimension	71 mm
Nose Dimension	30 mm
Gauge	3.5 mm ramping down to 1mm
Supplied cut to customer sizes up to:	2500 mm
Finishes Available & Light Reflective Values	<p>Satin Brass - LRV: 59.55</p> <p>Infills</p> <p>BTI49.5 Brass</p> <p>Polished Brass - LRV: 71.45 Satin Brass - LRV: 59.55 Antique Brass - LRV: 29.55 Antique Bronze - LRV: 9.15</p> <p>Infills</p> <p>Smooth Textured PVC</p> <p>Black - LRV: 4.47 Light Grey - LRV: 12.74 Polar Grey - LRV: 42.73 Porth Stone - LRV: 53.11</p> <p>Infills</p> <p>Castellated PVC</p> <p>Black - LRV: 4.25 White - LRV: 84.22 Light Grey - LRV: 12.33 Flint - LRV: 11.27 Granite - LRV: 7.02 Rustic - LRV: 5.52 Fawn - LRV: 11.27 Ivory - LRV: 37.42 Spruce - LRV: 6.38</p>

	<p>Jade - LRV: 7.33 Regency - LRV: 5.16 Mid Blue - LRV: 6.53 Nimbus - LRV: 4.77 Peat - LRV: 5.88 Yellow - LRV: 54.91 Poppy - LRV: 10.01 Claret - LRV: 5.83 Porth Stone - LRV: 52.91 Polar Grey - LRV: 42.53</p> <p>Infills</p> <p>Olympic Grip</p> <p>Black - LRV: 4.85</p>
Drilling	<p>Drilled for concealing plugs Undrilled Drilled with retro fit infill</p>
Screw Size	6
Application	To finish the nose edge of stone and timber stairs and stairs fitted with ceramics or hard flooring, e.g. laminates, LVT, vinyl, lino.
Suitability	Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.
Post Consumer Recyclability	This product is 100% recyclable at suitable disposal centres.

Infill Options



Infill	BTI49.5 Brass Insert
Material	Solid Brass Grade H/H CZ108 BS EN12164:2016
Slip Resistance Values	SRV Wet: 54 SRV Dry: 82
Drilling	Undrilled Drilled with retro fit infill



Infill	Smooth Textured PVC Insert
Material	PVC Compound
Slip Resistance Values	SRV Wet: 56 SRV Dry: 65
Drilling	Drilled for concealing plugs Undrilled Drilled with retro fit infill



Infill	Castellated PVC Insert
Material	PVC Compound
Slip Resistance Values	SRV Wet: 76 SRV Dry: 85
Drilling	Drilled for concealing plugs Undrilled Drilled with retro fit infill

Infill	Olympic Grip Insert
Material	Aluminium Oxide
Slip Resistance Values	SRV Wet: 71 SRV Dry: 102
Drilling	Undrilled Drilled with retro fit infill

Made with Precision, Finished with Care

Carpet Accessory Trims Limited. Units 24 A,B,C Park Avenue Estate, Luton, Bedfordshire LU3 3BP, UK

+44 (0) 1582 561 500

sales@catflooringaccessories.com

www.catflooringaccessories.com