


Product Technical Data Sheet

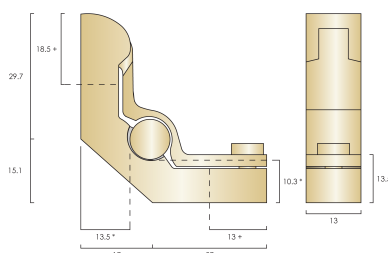

* Distance between Stair Rod fitted with Hinged Fixing Eye and stair tread & riser.
+ Distance to centre of fixing screw hole.

Catalogue Reference	10mm (3/8") Hinged Fixing Eye
Uniclass2015	Pr_35_90_31_83 Stair Rods
General Description	Solid brass hinged fixing eye for 10mm (3/8") diameter stair rods.
Material	Solid Brass Grade H/H CZ108 BS EN 12164:2017
Height	44.8 mm
External Dimensions	Width: 13 mm. Distance between stair rod and riser: 11.3 mm. Distance between stair rod and tread: 10.3 mm.
Finishes Available & Light Reflective Values	Satin Chrome
Fixing	Fix eyes into tread riser directly alongside the edge of the carpet runner leaving a gap of approximately 3mm (1/8"). For concrete stairs use rawl plugs for screw fixings. When fixing to timber stair, direct screw into tread and riser. Note, if wood is particularly hard, it may be required to pilot drill before fixing with screws. Stair rods are for aesthetic purposes only. Always use wooden gripper to fully secure carpet on stairs.
Screw Size	6
Compatible Products	10 mm Solid Brass Stair Rods
Additional Information	Stair rods are supplied one rod and two hinged fixing eyes per tread. The maximum recommended length for 10mm diameter is 800mm overall (0.8 m/31.5"). If the span increases CAT advise moving up to 12.5mm Rods. Measuring Tip - Add at least 100mm (3.9") to runner size.
Handling	Always wear gloves when handling stair rods. Do not handle with bare hands as sweat will cause rapid tarnishing of the finish.
Application	The Akeman Collection® of stair rods and fixing eyes are designed to be fitted as a decorative finish to any stairs.
Suitability	

Made with Precision, Finished with Care

CAT Flooring Accessories, Units 24 A,B,C Park Avenue Estate, Luton, Bedfordshire LU3 3BP, UK

+44 (0) 1582 561 500

sales@catflooringaccessories.com

www.catflooringaccessories.com