


Product Technical Data Sheet

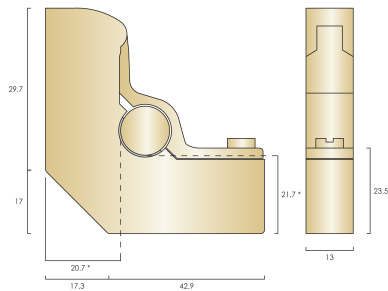

* Distance between Stair Rod fitted with High Style Hinged Fixing Eye and stair tread & riser.

Catalogue Reference	12.5mm (1/2") High Style Hinged Fixing Eye
Uniclass2015	Pr_35_90_31_83 Stair Rods
General Description	Solid brass high style hinged fixing eye for 12.5mm (1/2") diameter stair rods.
Material	Solid Brass Grade H/H CZ108 BS EN 12164:2017
External Dimensions	Width: 13.0 mm. Distance between stair rod and riser: 20.7 mm. Distance between stair rod and tread: 21.7 mm.
Finishes Available & Light Reflective Values	Antique Bronze
Fixing	Fix eyes into tread riser directly alongside the edge of the carpet runner leaving a gap of approximately 3mm (1/8"). For concrete stairs use rawl plugs for screw fixings. When fixing to timber stair, direct screw into tread and riser. Note, if wood is particularly hard, it may be required to pilot drill before fixing with screws. Stair rods are for aesthetic purposes only. Always use wooden gripper to fully secure carpet on stairs.
Screw Size	6
Compatible Products	12.5 mm Solid Brass Stair Rods
Additional Information	Stair rods are supplied one rod and two hinged fixing eyes per tread. Measuring Tip - Add at least 100 mm (3.9") to runner size.
Handling	Always wear gloves when handling stair rods. Do not handle with bare hands as sweat will cause rapid tarnishing of the finish.
Application	The Akeman Collection® of stair rods and fixing eyes are designed to be fitted as a decorative finish to any stairs.
Suitability	

Made with Precision, Finished with Care

CAT Flooring Accessories, Units 24 A,B,C Park Avenue Estate, Luton, Bedfordshire LU3 3BP, UK

+44 (0) 1582 561 500

sales@catflooringaccessories.com

www.catflooringaccessories.com