


Product Technical Data Sheet

25

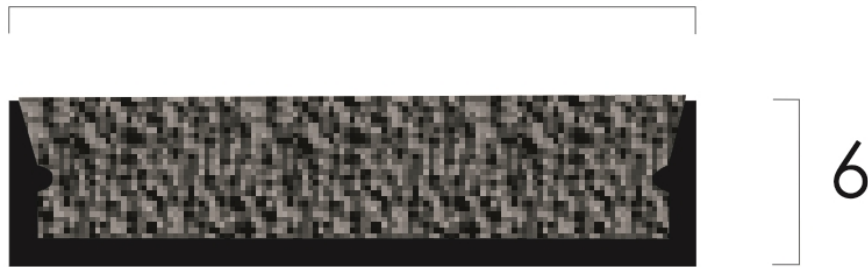

Catalogue Reference	Olympic 256
Uniclass2015	Pr_35_90_31_84 STAIR TRIMS
General Description	uPVC Stair Tread Insert with Olympic Carborundum infill.
Brand	Olympic™
Infill Options	Olympic Carborundum
Material	Formed Channel: uPVC, Infill: Aluminium Oxide
Tread Dimension	25 mm
Gauge	6 mm
Lengths Available	Supplied cut to customer sizes up to: 2000 mm
Finishes Available & Light Reflective Values	Black - LRV: 4.47 <b>Infills</b> Olympic Carborundum Black - LRV: 4.76 Yellow - LRV: 47.07 White - LRV: 58.45
Fixing	Adhesive. We recommend Stycco Flex rapid curing flexible adhesive by F. Ball & Co Ltd. subject to following their instructions for use.
Drilling	Undrilled
Application	For rebating into stone and wooden steps or between ceramic tiles, to provide a visual aid and some slip resistance. Suitable of exterior and interior applications. Installation guide available.
Suitability	Very heavy interior foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.

# Infill Options



<b>Infill</b>	Olympic Carborundum Infill
<b>Material</b>	Aluminium Oxide
<b>Slip Resistance Values</b>	SRV Wet: 86 SRV Dry: 92
<b>Suitability</b>	Exterior and wet environments and very heavy foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.

## Made with Precision, Finished with Care

Carpet Accessory Trims Limited. Units 24 A,B,C Park Avenue Estate, Luton, Bedfordshire LU3 3BP, UK

+44 (0) 1582 561 500

[sales@catflooringaccessories.com](mailto:sales@catflooringaccessories.com)

[www.catflooringaccessories.com](http://www.catflooringaccessories.com)