

Product Installation Guide

Product Range

Demarcation studs

Product Description

Designed to provide a demarcation boundary line, e.g. outside eating areas between coffee houses and at step edges. The low profile design does not present a trip hazard and will not confuse people with vision impairment. Larger diameter studs can be used on roadways to demarcate parking bays, etc.

Demarcation studs are supplied with a plain surface pattern as standard, tactile studs are available to special order.

Our demarcation studs are available in Mill Brass and Antique Brass finishes to suit all installations.


General:

Our demarcation studs are suitable for *adhesive fixing.


It is recommended that a sample is always requested for approval prior to rebating as dimensions may vary. For further advice, contact the CAT sales office.

Ensure that the area where the demarcation studs are to be installed is level and in good repair. Any remedial work should be completed in advance of fixing the studs and where this requires wet treatments, these must be allowed to fully cure before commencing the installation.


Installation:

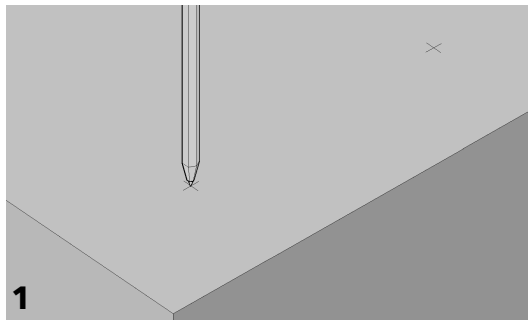


Measure and mark the position of the demarcation studs at the desired spacings, typically 300mm centres.

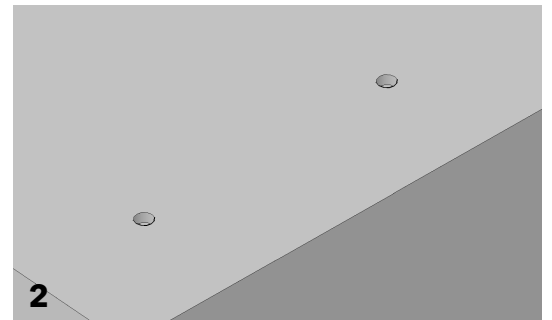

With a suitable drill for your existing floor covering or substrate, drill holes to suit the chosen profile, making a tolerance allowance for any small variation in the sizes and to accommodate the fixing adhesive.

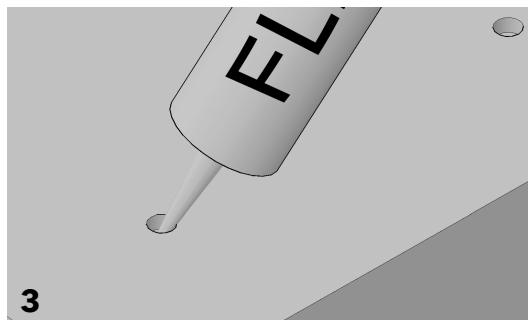

Ensure that the drilled holes are dust and grease free before applying the adhesive to fix the chosen profile. Care should be taken to apply sufficient adhesive to create an effective bond but not cause excess oozing on to the tread surface.

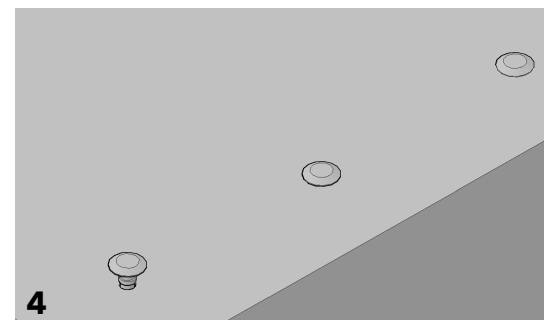

Position the profile into the hole and gently press down into the adhesive. If any excess adhesive oozes to the surface, it should be immediately removed.

Access to the stairs should only be permitted when the adhesive has had time to fully cure.



CAT *recommends the use of STYCCO FLEX to fix any of its extensive range of stair nosings, stair edgings and stair insert products. STYCCO FLEX is a rapid curing flexible adhesive with excellent gap filling properties that can be used outside as well as inside. *subject to following the instructions given by F. Ball and Co Ltd in their STYCCO FLEX product technical data sheet, safety data sheet and installation guidelines, available in full from: www.f-ball.com

Made with Precision, Finished with Care

CAT Flooring Accessories, Units 24 A,B,C, Park Avenue Estate, Luton, Bedfordshire LU3 3BP, U.K.

T: +44 (0) 1582 561 500

email: sales@catflooringaccessories.com

website: www.catflooringaccessories.com